



Bodur Series Security Safes: Class V as per EN 1143-1

Free-standing **Bodur 5** series security safes were developed to protect assets with a high insurance value. They are distinguished by their thin-wall and lightweight construction.

The door and walls are filled with specifically patented armouring and special concrete.

All safes have a full-circumference fire seam and offer fire protection in addition to defined burglary protection. Thermal and mechanical tools protect the safe body and door against attack.

A 3-way compact locking mechanism, tried and tested over many years, is used in all safe types; they have two locking positions and several internal, emergency locking mechanisms.

Any lock refitting needed later on is practically effortless and does not require a laborious cable deflector.

Product description: BWS Class 5

- ★ Tested at the VdS testing laboratory in Cologne
- ★ Certified by VdS (VdS 2450) based on EN 1143-1
- ★ Door thickness: approx. 150 mm
- ★ Wall thickness: approx. 60 mm
- ★ Door opening angle: 145 degrees
- ★ Door stop on the right
- ★ 3-way locking mechanism with internal emergency locks and 2 lock positions
- ★ Locked by round bolts on all sides
- ★ Black a protruding
- ★ Series delivered with 2 x keys for high-security locks (positioned right/left) according to EN 1300
- ★ Internal hinges up to size “120”
- ★ External hinges from size “120/1”
- ★ Safes are factory pre-fitted with fixtures for an electronic alarm system
- ★ Standard double floor anchoring and one wall anchorage; not drilled through
- ★ Anchoring materials included for floor anchoring
- ★ 1 cable entry in the back wall and side wall (right and left); not drilled through (1cm²)
- ★ Standard RAL colour: RAL 7035



Fig.: Security safe in the Bodur BWS series: Class. 5 (up to size BWS 5-120)



Fig.: Security safe in the Bodur BWS 5 series (from BWS 5-120/1) with 2x mechan. Numerical combination lock (optional)




Bodur Series Security Safes: Class V as per EN 1143-1

Technical data


Safe type*	External HxWxD (in mm)	Internal HxWxD (in mm)	Number of folders**/***	Weight (in kg)	Compartment shelves (number)	Bands (location)	Anchoring points in the floor/back wall	Alarm system fittings
BWS 5-80	880x610x570	760x490x360	12	494	1	inside	2x / 1x	ja
BWS 5-100	1090x610x570	970x490x360	15	588	1	inside	2x / 1x	ja
BWS 5-120	1240x610x570	1120x490x360	18	655	2	inside	2x / 1x	ja
BWS 5-120/1	1240x780x730	1120x660x520	24	844	2	outside	2x / 1x	ja
BWS 5-160	1640x780x730	1520x660x520	32	1116	3	outside	2x / 1x	ja
BWS 5-180	1840x780x730	1720x660x520	38	1221	4	outside	2x / 1x	ja

* For recommended insured value, please refer to our information sheet "Recommended insured values".
 ** Optional installation of interior safe is possible
 *** File folder width: 75 mm


Door clearance width dimension is 10 mm smaller.
 Dimensions without fittings, lock or hinge.

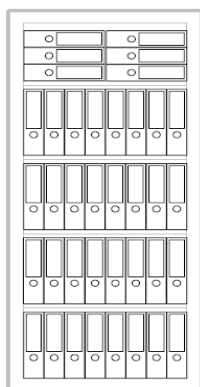


BWS 5-180




BWS 5-160



BWS 5-120/1



BWS 5-120



BWS 5-100



BWS 80

Possible safe insides/optional/external dimensions:

350 mm in height

350 mm in height

260 mm in height

260 mm in height

170 mm in height

170 mm in height

Contact data:

Contact: Mr Frank Steinhardt
 Tel.: +420 547 423 411
 Fax: +420 547 230 072
 E-Mail: steinhardt@bodepanzer.cz

Attention: These are estimated values. We reserve the right to make technical changes